




Raptor 2500 FPS

2560 x 2048 Color Video Graphics
Digital Flat Panel Subsystem

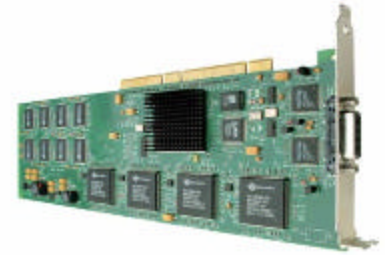

Raptor 2500 FPS

Features and Benefits

- Fully end-to-end digital system
- Compatible with existing ATC systems
- 28.3" LCD display
- 100% brighter and clearer than analog displays
- Highest resolution available - 2560 x 2048
- 85% lighter weight, 66% power reduction
- Software-controllable brightness and contrast
- MOX-compatible, multilayered display

The Tech Source Raptor 2500 FPS is a digital flat panel display subsystem designed for use in high resolution, high performance, color graphics applications such as Air Traffic Management and Vessel Traffic Control. Consisting of a single-slot PCI card and a 28.3" flat panel monitor, it provides a comprehensive array of high-end graphics capabilities including 2560 x 2048 resolution, 2560 displayable colors and 32 independently addressable overlays.

The digital flat panel monitor, designed to fit in existing ATC consoles, is 85% lighter and consumes

66% less power than current analog displays. In addition, it is 100% brighter than analog displays and has software-controllable brightness adjustments.

Multiple overlay configuration is supported through the published X Server Extension called MOX (Multiple Overlay eXtension). Double buffering is available using standard software interfaces such as MBX (Multi-Buffering extension for X Server) and DBE (Double Buffering Extension). Specialized hardware performs back buffer screen erases at extremely high speeds.

Raptor 2500 FPS Technical Specifications

Raptor 2500 FPS Landscape flat panel subsystem includes a Raptor 2500 Digital 2560 x 2048 display controller, a 28.3" 2560 x 2048 Digital Flat Panel display, cables, software drivers and manuals.

Graphics Card Specifications

On-board Memory	64 MB
Color Lookup Tables	One primary table (2048 entries), two auxiliary (256 entries each)
Number of Dynamic Layers	32
PCI Interface	33/66 MHz 32/64-bit, Revision 2.2
Video Interface	DVI
Power Consumption	25Less than 25W
Physical Specifications	(L) 12.283 x (H) 4.2 in (PCI long format)

Flat Panel Monitor Specifications

Screen Size	28.3 in. (71.8 cm) diagonal
Display Size	(V) 17.7 x (H) 22.1 in. [(V) 44.9 x (H) 56.1 cm]
Pixel Resolution	2560 x 2048
Pixel Pitch	(H) 0.219 x (V) 0.219 mm
Brightness	225 cd/m ²
Contrast Ratio	400:1
Weight	88 lbs (44 kg)
Power Consumption	144 W
Environmental Specifications	
Operating Temperature	50° to 104° F (10° to 40° C)
Storage Temperature	4° to 140° F (-20° to 60° C)
Humidity	95% relative humidity, non-condensing

Software Environment	Loadable drivers and X Window support for: Sun Solaris OS Tru64 UNIX, Linux (Red Hat & SUSE), HP-UX, OpenVMS, Windows 2000 and Windows XP
-----------------------------	---

Tech Source

3340 Edgewater Dr.
Orlando, FL 32804
407.262.7100

www.techsource.com

Tech Source, the Tech Source logo, and Raptor 2500 FPS are trademarks of Tech Source, Inc. All other trademarks are the property of their respective owners. ©2002 Tech Source, Inc. All rights reserved. Information in this document is subject to change without notice. Tech Source, Inc. assumes no responsibility for errors or omissions that may appear in this document.